


# Ubhejane Creche

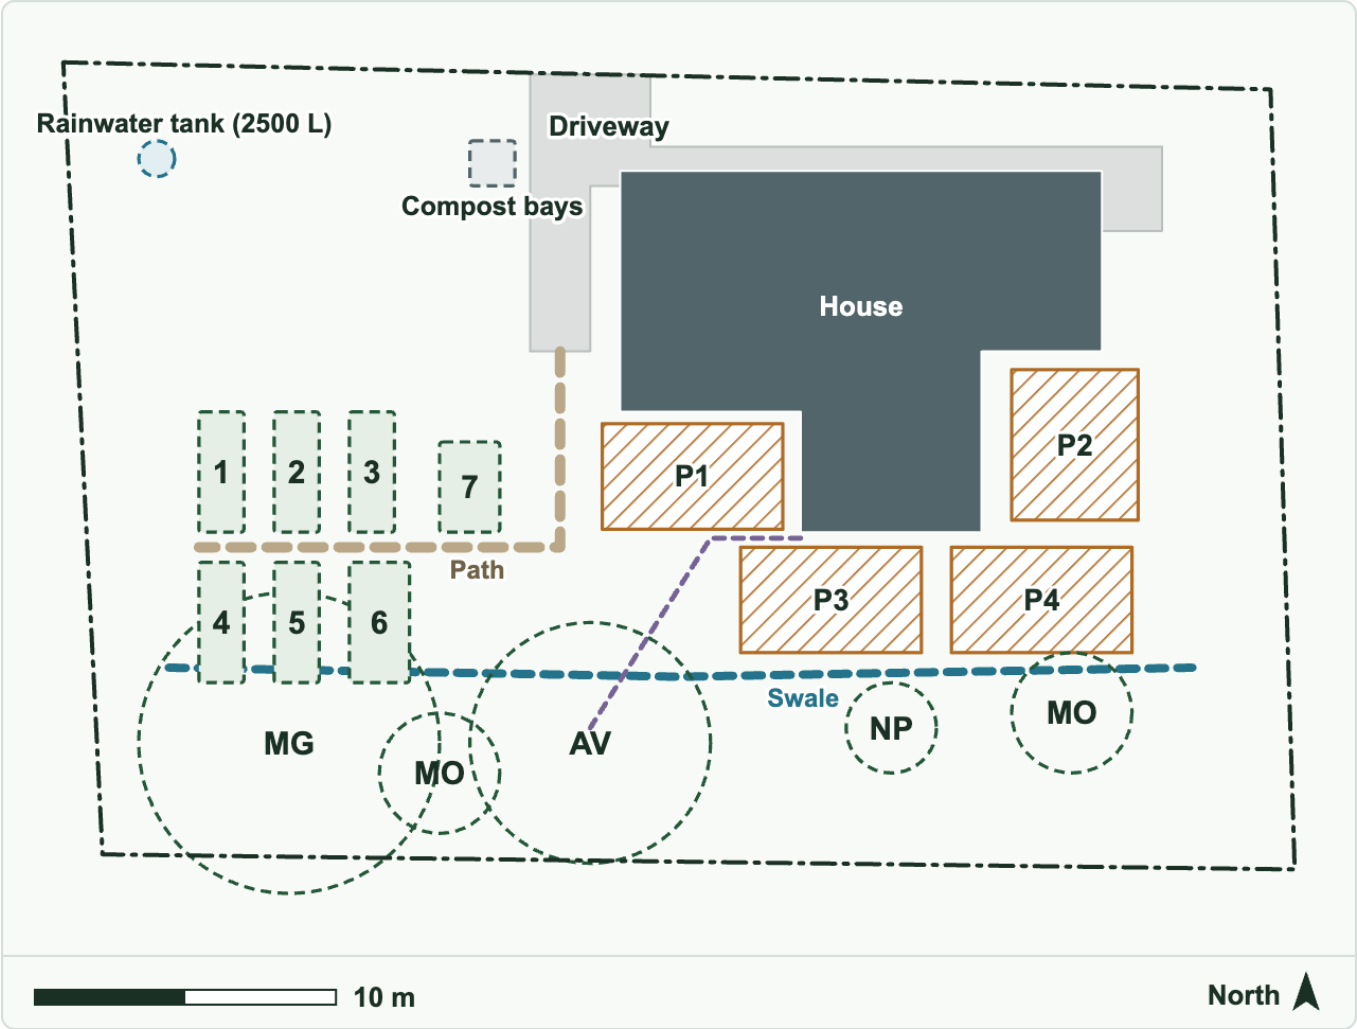

- Site boundary
- [1] 7 vegetable beds, numbered
- ( ) 5 trees and plantings, to scale
- ▒ Paving and driveway
- Path
- Greywater line
- ▒ Buildings
- [ ] 4 staple plots (P1–P4)
- ( ) 1 water tank or water point
- [ ] 1 structure
- Swale

▒ Solid = already there. Dashed outline = planned, not built yet.

Plant codes: AV Avocado Tree · MG Mango Tree · MO Moringa Tree ×2 · NP Natal Plum

Drawn to scale from the saved design. North is up. Bed numbers match the bed list. It is not a land survey. Source: Saved design (2026-10-02); boundary and buildings as traced on the map


# The site at a glance

|                                 |                              |                  |                                     |
|---------------------------------|------------------------------|------------------|-------------------------------------|
| Mapped site                     | Growing space                | Annual rainfall  | Storage in the plan                 |
| <b>1 037 m<sup>2</sup></b>      | <b>128 m<sup>2</sup></b>     | <b>768 mm</b>    | <b>2 500 L</b>                      |
| Traced by the farmer on the map | Mapped beds and staple plots | Climate estimate | Stated capacity; check installation |

Saved design quantities and site data. Planned work remains distinct from completed work.

## How the ground is used

The whole site: 1 037 m<sup>2</sup>

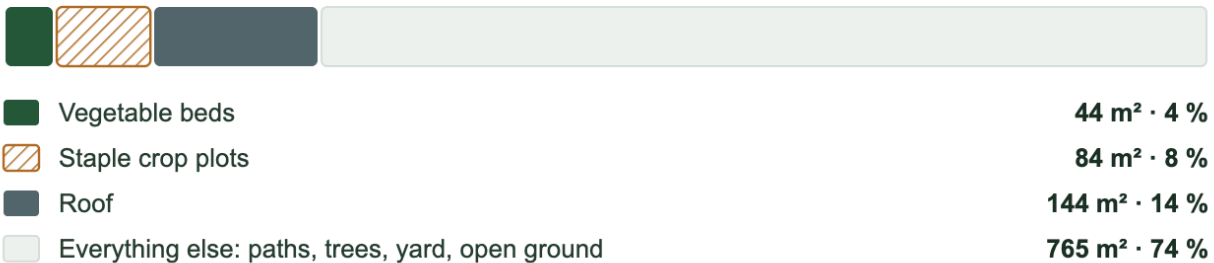

Areas as drawn on the saved design and traced on the map, whether built yet or not. Trees, paths and tanks are not counted as areas. Source: Boundary: Traced by the farmer on the map. Beds and plots: saved design.


## Built, and still to build

4 already there · 17 still to build or plant

|                                                          |                 |       |
|----------------------------------------------------------|-----------------|-------|
| Vegetable beds                                           | ○ ○ ○ ○ ○ ○ ○ ○ | 0 / 7 |
| Staple crop plots                                        | ● ● ● ●         | 4 / 4 |
| Trees and plants                                         | ○ ○ ○ ○ ○ ○     | 0 / 5 |
| Water                                                    | ○               | 0 / 1 |
| Structures                                               | ○               | 0 / 1 |
| Paths, swales and pipes                                  | ○ ○ ○           | 0 / 3 |
| ● Already there      ○ Planned, not built or planted yet |                 |       |
| Numbers: there now / total                               |                 |       |

One mark for each thing on the saved design, as it was marked there. Change an item to "existing" in the Design Studio once it is in the ground. Source: Saved design (2026-10-02)


# What has been priced

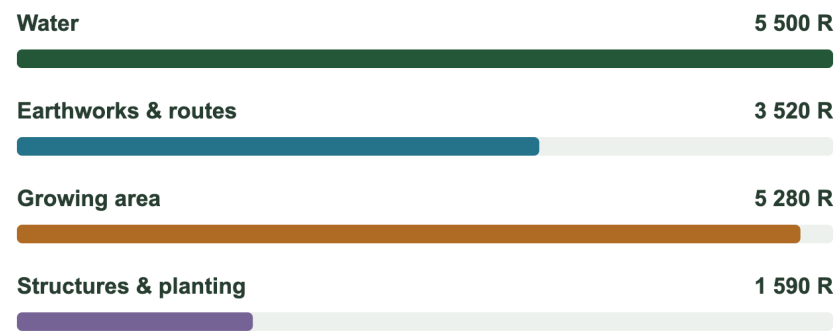


Planned priced subtotal:  
R 15 890. 2 lines still need a  
price or measurement. Existing  
items are excluded. Confirm  
current local quotes.

# Rain and warmth through the year

**768 mm of rain in an average year**  
Wettest month: Jan (129 mm) · Driest month: Jun (14 mm)

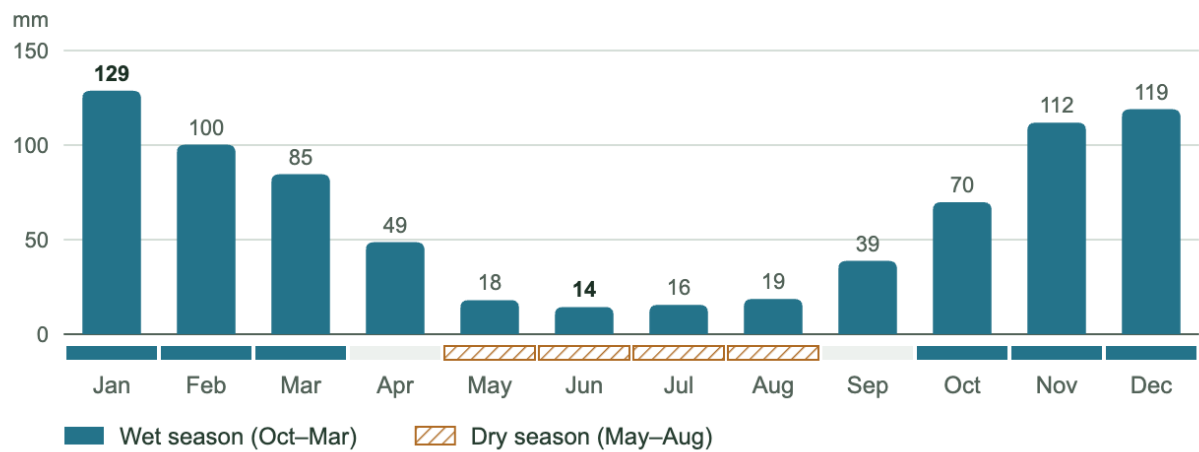

## Average temperature each month (°C)

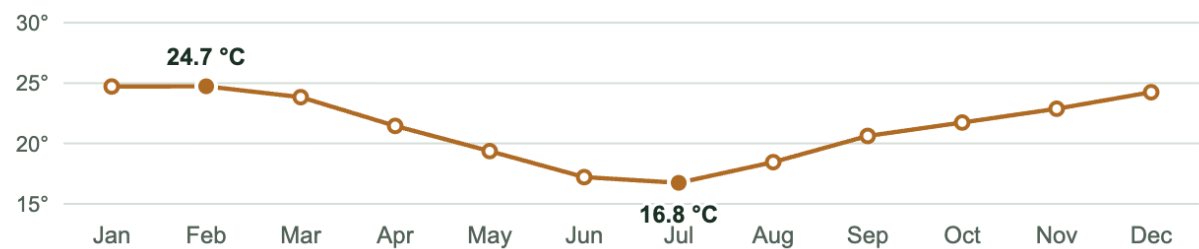


Long-term monthly averages for this location, not a forecast. Any one year can be much wetter or much drier than this.  
Source: NASA POWER (50 km climate grid)

# Sun, wind and slope

## The midday sun stands to the north

Winter: 39° above the horizon, a 1 m post throws a 1.2 m shadow · Summer: 86°

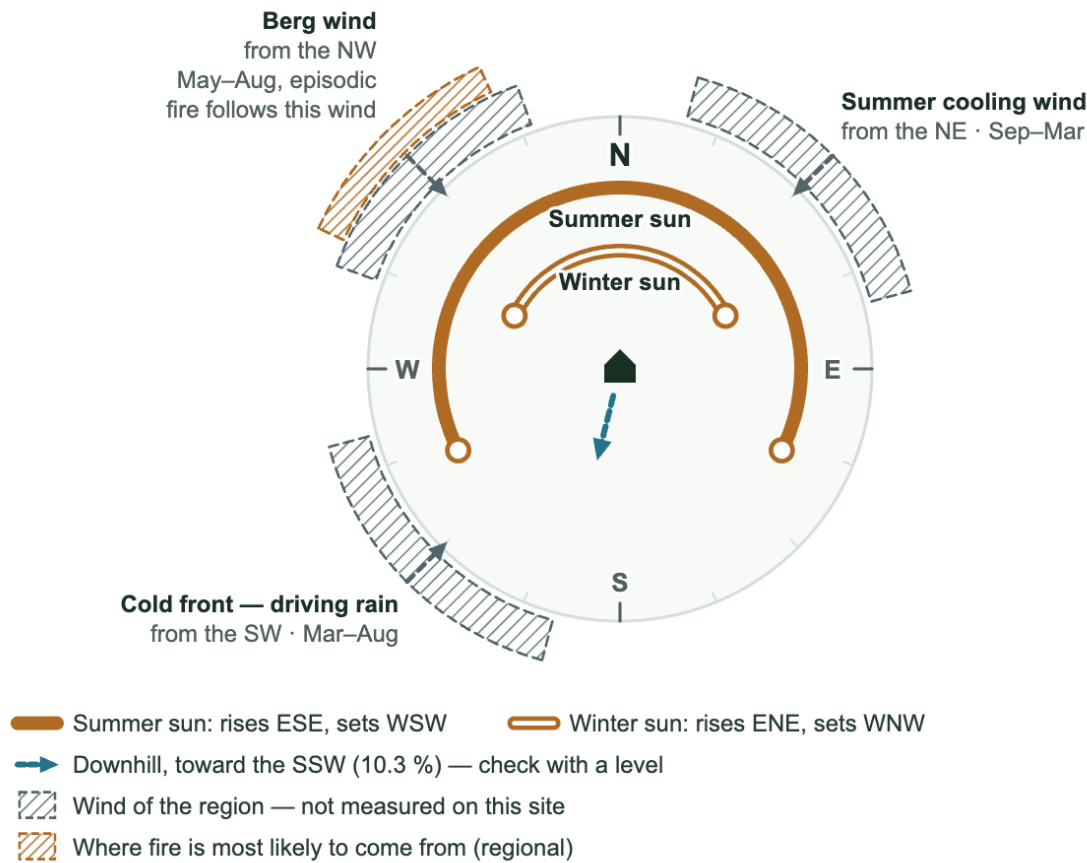

North is up; the house mark is this site. Sun paths are calculated from the latitude. Hatched marks are regional patterns, not measurements: check them against what you and your neighbours see. Source: Sun: calculated for latitude 27.73° S. Wind and fire: regional pattern (kzn-coastal). Slope: elevation model.

## Contents

---

1. report basis
2. Ubhejane Creche
3. Crop plan
4. Water, soil and the mapped site
5. Bill of quantities
6. Next actions and checks
7. Full design inventory
8. Production spaces
9. Evidence and limitations

### 1. report basis

---

This ready-to-read sample is assembled from the saved site and design records. It is not a new AI analysis or an independently verified assessment. Sample finances, soil examples and household examples remain illustrative wherever labelled. Planned areas and infrastructure do not establish completed work.

### 2. Ubhejane Creche

---

- 27.7262°S, 31.9630°E
- Mapped boundary: 1 037 m<sup>2</sup>
- Mapped growing area: 128 m<sup>2</sup>
- Vegetable beds: 7 - 44 m<sup>2</sup>
- Staple plots: 4 - 84 m<sup>2</sup>
- Mapped space is not confirmation that all of it is currently in production.
- Annual rainfall estimate: 768 mm
- Soil: pH 6.3 - SoilGrids model; confirm on site
- Stated tank capacity in the design: 2 500 L
- Capacity is not water currently available; check which tanks are already installed.


### 3. Crop plan

---

- This is the saved planting plan, not a harvest or sales record. Check actual bed clearance before each next planting.
- For seed quantities, use the crop planner's seed list. Do not buy seed from an inferred yield or monthly availability chart.
- Garlic - Bed 6 - sow: May - once only: May - includes an existing crop
- Onions - Bed 1 - sow: Mar - once only: Mar - includes an existing crop
- Butternut - Bed 3 - sow: Dec
- Swiss chard (spinach) - Bed 5 - sow: Apr - once only: Apr - includes an existing crop
- Tomatoes - Bed 4 - sow: Oct
- Maize (mielies) - Bed 7 - sow: Oct
- Green beans - Bed 5 - sow: Oct
- Lettuce - Bed 2, Bed 3 - sow: May, Sep - once only: May - includes an existing crop
- Broccoli - Bed 6 - sow: Feb
- Sweet potato - Bed 6 - sow: Oct

- Cabbage - Bed 1, Bed 2 - sow: Mar - once only: Mar - includes an existing crop
- Carrots - Bed 2, Bed 4 - sow: Apr

### Move each crop family on, every season

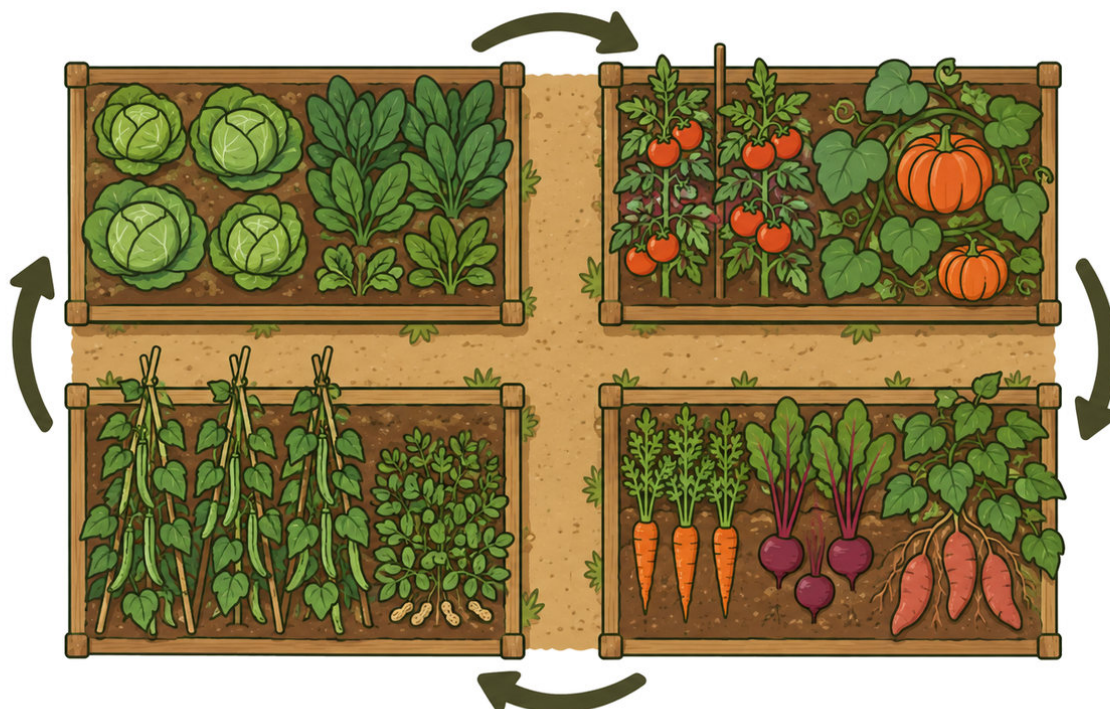

Concept illustration, the same in every report. It is not a picture of this site. The report's own calendar says what is planted where; this shows only the principle.


## 4. Water, soil and the mapped site

- Soil: pH 6.3 - SoilGrids model; confirm on site
- Stated tank capacity in the design: 2 500 L
- Capacity is not water currently available; check which tanks are already installed.
- Traced roof: 144 m<sup>2</sup>
- Rainwater tank (2500 L) ×1 - planned
- Swale (on-contour earthwork): 34 m
- Path: 18.5 m
- Greywater line: 10.5 m
- Confirm water reliability, drainage and soil condition on the ground before construction or amendment purchases.

Roof water: what comes in and what goes out

This roof can catch 88 474 L in an average year

144 m<sup>2</sup> of traced roof × 768 mm of rain × 0.8 (the rest is lost to splash and the first dirty flush)

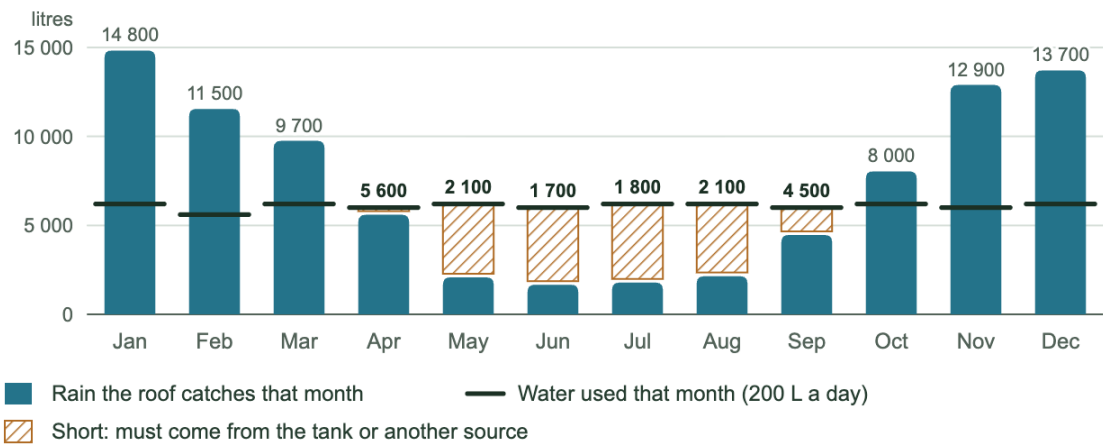

Tank storage

On the plan — planned, not installed yet

2 500 L

Needed to carry this use through the dry months (Tank Calculator)

18 900 L

The roof catches less than is used in Apr–Sep. Over the longest dry run the gap adds up to 18 900 L.

Average-year arithmetic, not a promise of rain. It counts only the roof that has been traced and only the tanks drawn on the plan; it says nothing about whether the water is safe to drink. Source: Roof: Traced by the farmer on the map. Rain: NASA POWER (50 km climate grid). Daily use: as recorded in the Design Studio.


Follow the water through the site




Concept illustration, the same in every report. It is not a picture of this site. It does not confirm a tank is installed, a pipe is correctly sized or water is safe to use.

# Soil at a glance

## How sour or sweet the soil is (pH)

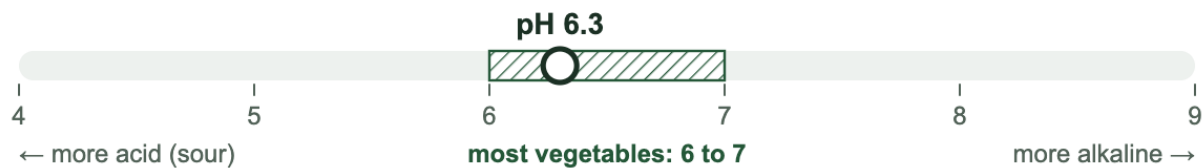

## What the soil is made of: Sandy clay loam




## Organic carbon: how much rotted plant matter the soil holds



○ Hollow dot and dashed outlines: estimated for this location by the SoilGrids world soil model, not measured here. A soil test on your own sample will replace them.

Top 30 cm of soil. No "good" or "bad" bands are drawn for organic carbon because the right level depends on the soil type and climate. Source: SoilGrids world soil model (ISRIC), 250 m grid: an estimate, not a measurement

# Look below the surface

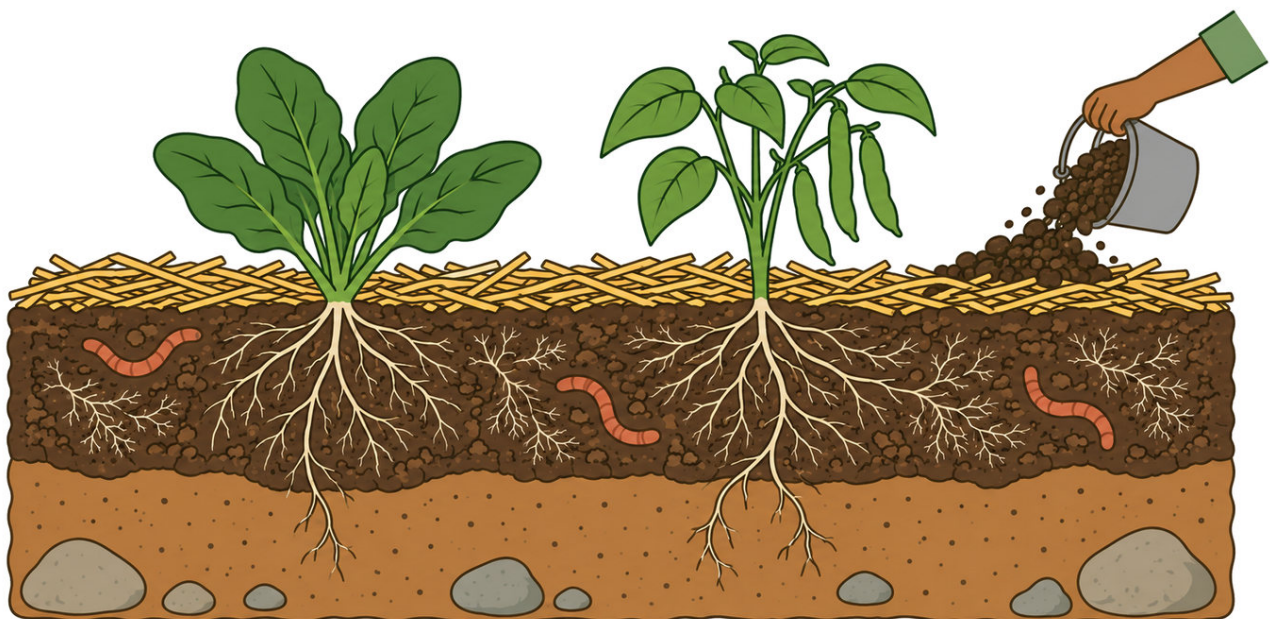

Concept illustration, the same in every report. It is not a picture of this site. Use the site evidence checklist to add soil observations and laboratory results. This illustration does not describe measured conditions at this site.

## 5. Bill of quantities


- Priced infrastructure subtotal: R 15 890
- Lines awaiting a price or measurement: 2
- Planned budget, not actual spending. A missing price is not zero. Obtain current local quotes.
- Rainwater tank (2500 L) (2 500 L) - 1 no. - R 5 500
- Swale (on-contour earthwork) - 34 m - R 2 040
- Path - 18.5 m - R 1 480
- Greywater line - 10.5 m - quote / measurement needed
- Vegetable beds established (7 beds) - 44 m<sup>2</sup> - R 5 280
- Staple plots established (4 plots) - 84 m<sup>2</sup> - quote / measurement needed
- Moringa Tree - 2 no. - R 160
- Avocado Tree - 1 no. - R 450
- Compost bays - 1 no. - R 600
- Mango Tree - 1 no. - R 300
- Natal Plum - 1 no. - R 80

## 6. Next actions and checks

### Order of work

#### 6 stages of work. The last one starts around week 11

Stages overlap: the next one can start before the one before it is finished.

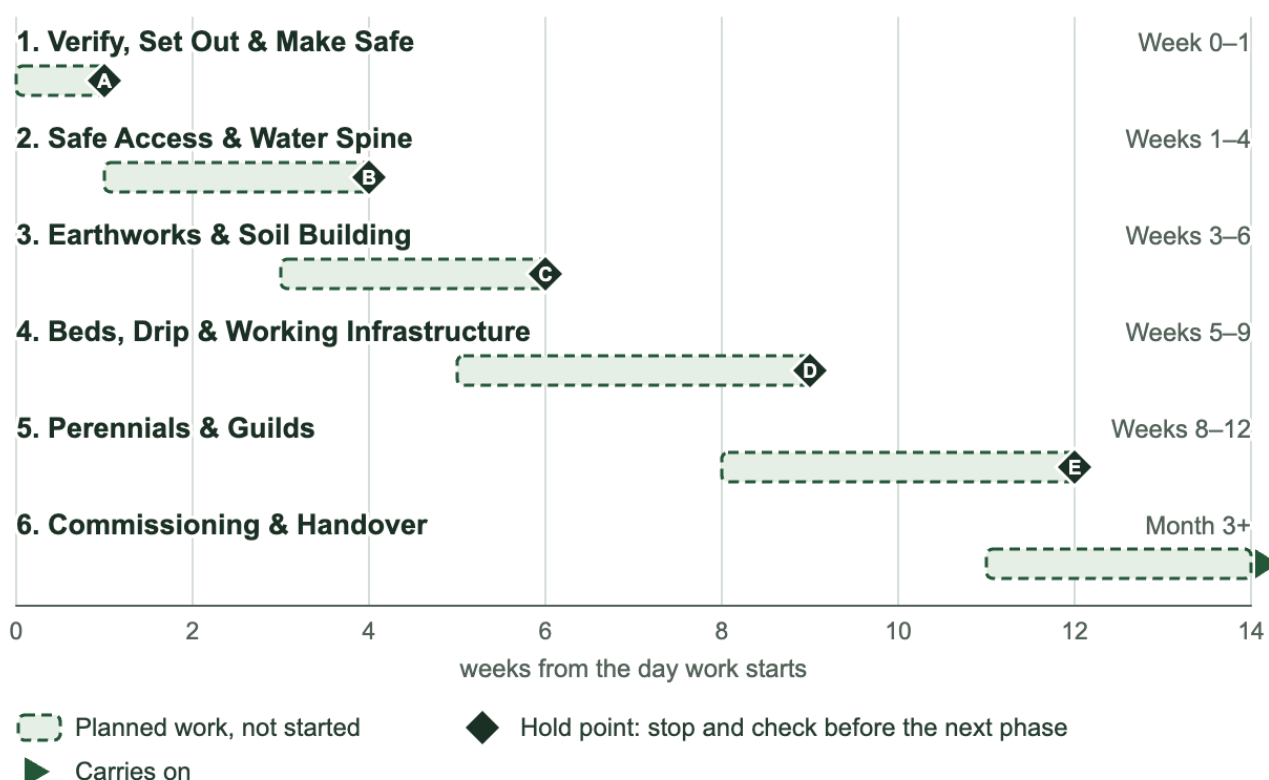


The order and rough length of each phase, worked out from what is on the saved design. The weeks are a planning guide, not a promise: weather, money and labour will move them. The order should not change. Source: Build phases derived from the saved design

- Confirm what is already on the site and what is still proposed. Keep the saved design as the reference.
- Check the crop plan against the real beds and seasonal conditions. A planned sowing is not proof of planting.
- Record harvest weight, food kept or donated, sales and costs with their dates.
- Check production area on site before reporting hectares to a funder. Count each physical bed once.
- Agree support actions with the farmer. At review, record what improved, what did not and what needs to change.
- This summary uses saved measurements and plan quantities. Read the full report for detailed advice, assumptions and source notes.

## 7. Full design inventory

### Trees mentioned in this section

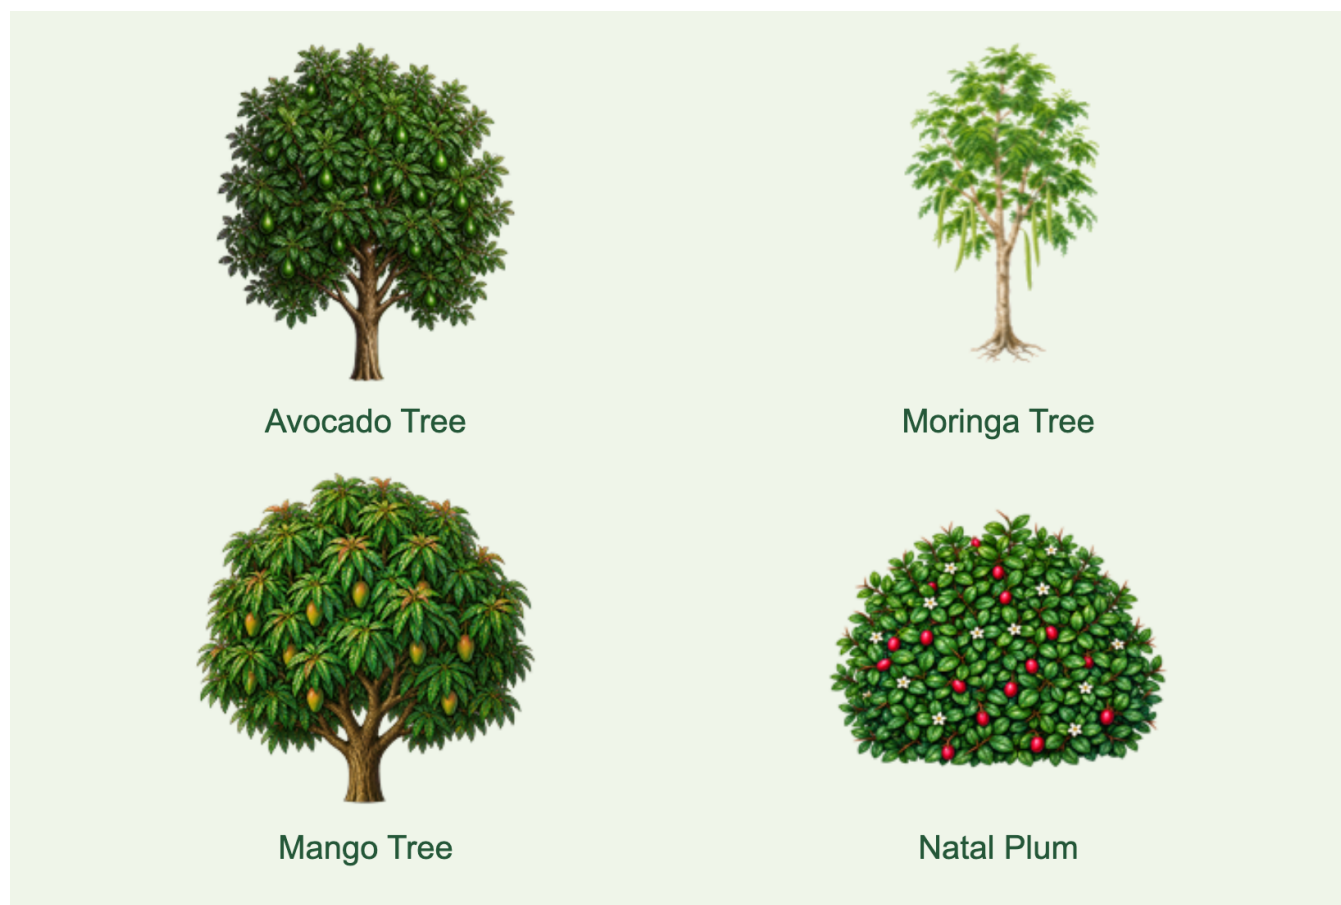


Catalogue illustrations, not site photographs or identification evidence. Read the advice and confirm local suitability before choosing plants.

- Moringa Tree × 2 - proposed
- Avocado Tree × 1 - proposed
- Compost bays × 1 - proposed
- Mango Tree × 1 - proposed
- Natal Plum × 1 - proposed
- Rainwater tank (2500 L) × 1 - proposed

## 8. Production spaces

---

### Something to harvest in every season

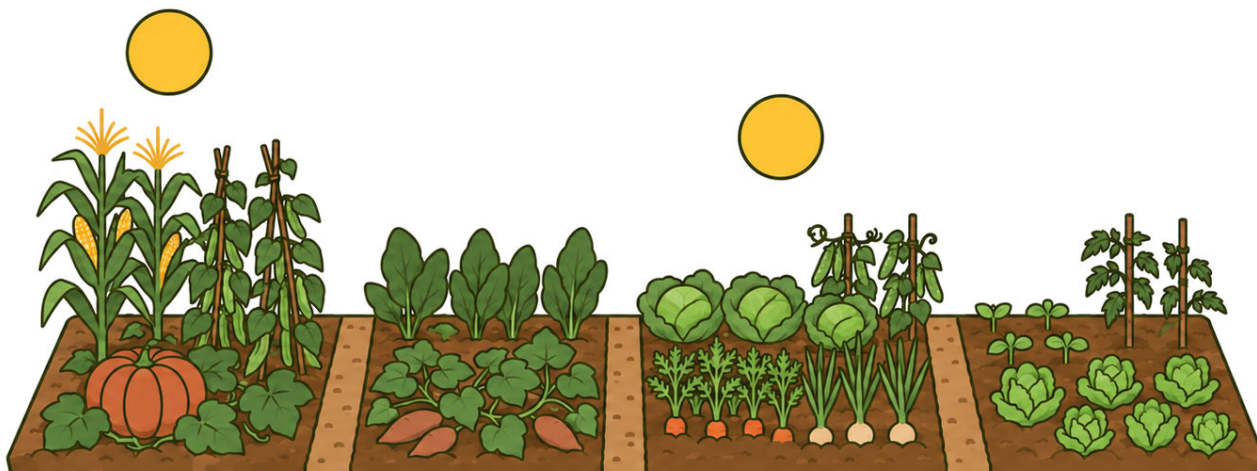

Concept illustration, the same in every report. It is not a picture of this site. The crops and months for this site are in its planting calendar.

- Bed 1 - 6 m<sup>2</sup> - bed
- Bed 2 - 6 m<sup>2</sup> - bed
- Bed 3 - 6 m<sup>2</sup> - bed
- Bed 4 - 6 m<sup>2</sup> - bed
- Bed 5 - 6 m<sup>2</sup> - bed
- Bed 6 - 8 m<sup>2</sup> - bed
- Bed 7 - 6 m<sup>2</sup> - bed
- Plot 1 - 21 m<sup>2</sup> - plot
- Plot 2 - 21 m<sup>2</sup> - plot
- Plot 3 - 21 m<sup>2</sup> - plot
- Plot 4 - 21 m<sup>2</sup> - plot

## 9. Evidence and limitations

---

Site photos and map plates, where available, are shown separately in this report. An AI-generated reference photograph is not evidence of the real site. Missing measurements, quotes or records remain missing. Review the site, dates and evidence with the implementing organisation before using this example for a funding decision.

# Seasonal sowing calendar

Saved plan: 2026/10/02

S = sow seed (in trays for transplant crops). T = check seedlings; transplant when ready. Check water and field conditions before planting.

| Crop            | Oct<br>2026 | Nov<br>2026 | Dec<br>2026 | Jan<br>2027 | Feb<br>2027 | Mar<br>2027 | Apr<br>2027 | May<br>2027 | Jun<br>2027 | Jul<br>2027 | Aug<br>2027 | Sept<br>2027 |
|-----------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|--------------|
| Tomatoes        | S           | T           |             |             |             |             |             |             |             |             |             |              |
| Green beans     | S           |             |             |             |             |             |             |             |             |             |             |              |
| Sweet potato    | S           |             |             |             |             |             |             |             |             |             |             |              |
| Maize (mielies) | S           |             |             |             |             |             |             |             |             |             |             |              |
| Butternut       |             |             | S           |             |             |             |             |             |             |             |             |              |
| Broccoli        |             |             |             |             | S           | T           |             |             |             |             |             |              |
| Carrots         |             |             |             |             |             |             | S           |             |             |             |             |              |
| Lettuce         |             |             |             |             |             |             |             |             |             |             |             | S            |

No new start in this period: Garlic, Onions, Swiss chard (spinach), Cabbage.

Bed allocations, varieties, seed buying and monthly jobs are in the separate crop-plan report. This calendar shows planned starts, not confirmation of planting.

[Open current crop planner](#)